






VERSALIFT

VST Insulated

236i • 240i • 5000i • 5500i • 6000i • MHI

VST Insulated

236i • 240i • 5000i • 5500i • 6000i • MHI
Stabitel - telescopic insulated platform

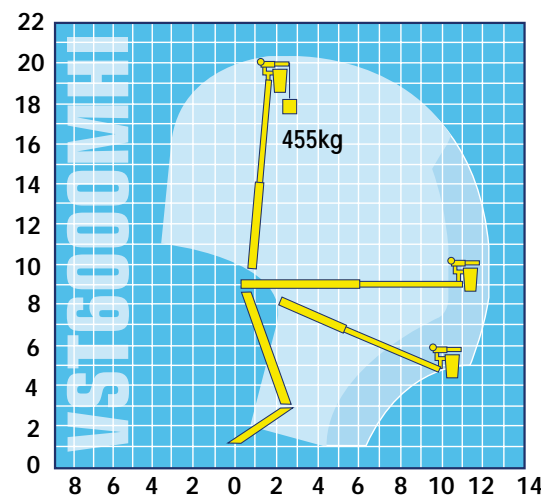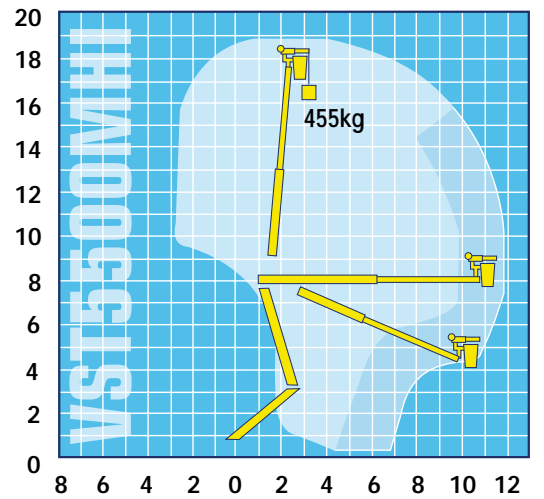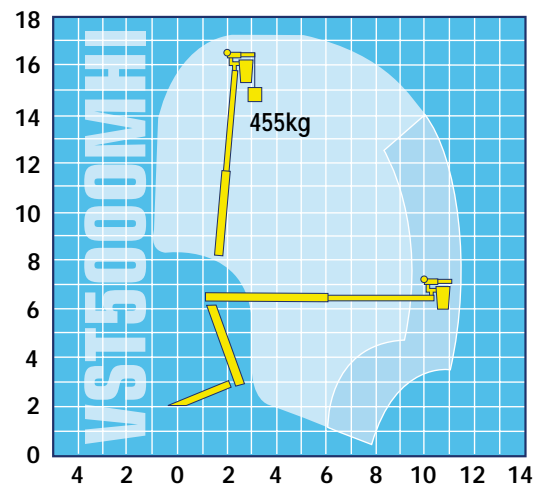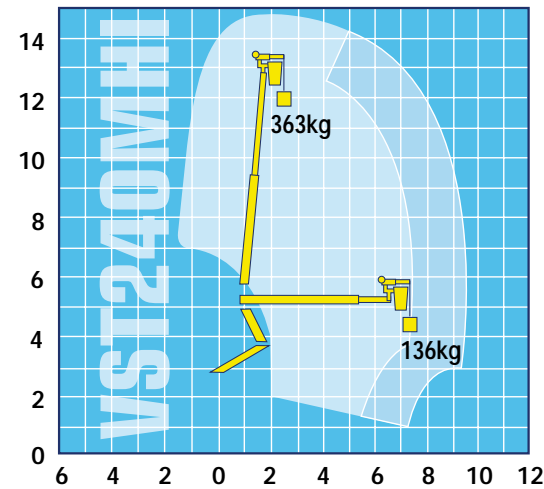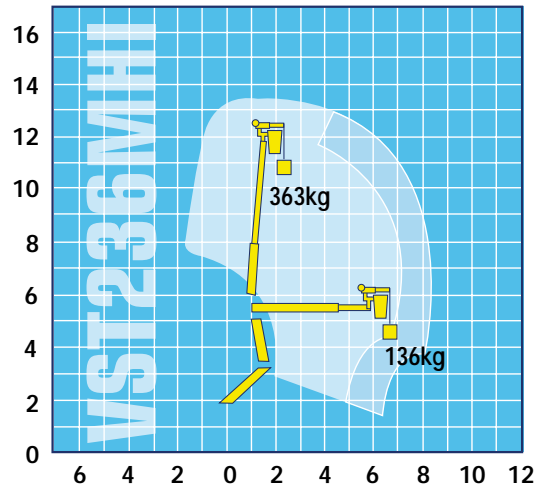

specifications

	VST236i MHI	VST240i MHI	VST5000i MHI	VST5500i MHI	VST6000i MHI
max. working height	13.4m	14.8m	17.2m	18.9m	20.3m
max. platform height	11.4m	12.8m	15.2m	16.9m	18.3m
horizontal outreach@200kg SWL	8.3m	9.5m	11.5m	11.9m	12.3m
horizontal outreach@250kg SWL	7.2m	7.3m	n/a	n/a	n/a
horizontal outreach@165kg SWL	n/a	n/a	9.5m	9.9m	10.3m
horiz. outreach MH@200kg SWL	7.2m	7.3m	9.5m	9.9m	10.3m
articulated lower boom	0° to 80°	0° to 80°	0° to 80°	0° to 80°	0° to 80°
main boom	-25 to 80°	-25 to 80°	-25 to 80°	-25 to 80°	-25 to 80°
material handling max.	363kg	363kg	455kg	455kg	455kg
bucket rotation	180°	180°	180°	180°	180°
pedestal rotation	360° continuous				
electric insulation	up to 46kv	up to 46kv	up to 46kv or optional up to 69kv		

Please note that SWL, outreach and working height vary according to specification of platform and vehicle.
Above figures are intended as best guide only.

Versalift is certified to ISO9001: 2000 by TUV UK Quality Assurance Ltd; certificate number GB00468.

- All dimensions in metres
- Reach of VST Insulated (2 man operation)
- Reach of VST Insulated (2 man with material handling)

Depending on vehicle, type of stabilization & cage= Load

Insulated 46kv

Up to 20.3m

Up to 12.3m

Telescopic boom models

360° continuous



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT
Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.



VERSALIFT

VST Insulated

236i • 240i • 5000i • 5500i • 6000i • MHI
 Stabitel - telescopic insulated platform

Heavy duty telescoping machine with the facility to include the option of adding 'Material Handling' (MH) jib and winch, which has a 363kg capacity on the two smaller machines and 455kg on the larger machines. With the lower boom capable of 80° operation. The option of two single man buckets is also available although this does effect SWL and material handling capacity, subject to specification.



A single two-man bucket with a SWL of 250kg is fitted when not supplied without material handling and 200kg SWL with material handling. Outreach is restricted when material handling is fitted and height restricted on VST240MHi.

Full size heavy duty insulated machines such as these vary in configuration and specification by each customer, so for your particular requirements please call Versalift direct to discuss particular situation and operational conditions.



comment

Jib & Winch Option

Automatically levelled with the platform, the jib provides up to 455kg capacity at elevated positions. The angle of the jib can be manually adjusted from horizontal to 50° in 10° increments.



features & benefits

Side mounted booms designed for low stowing of platform with insulated fibreglass inner (upper) boom and ELEKTROGARD outer (lower) fibreglass boom tip providing 96.5cm insulation gap for testing per ANSI A92.2-1990 for category C, 46kv and below

Lower boom with chassis insulating system, fibreglass (insert) providing 30.5cm insulation gap for testing per ANSI A92.2-1990

Closed fibreglass step over style bucket for two man operation, with integral finger guard and insulating liner, complete with two harness anchors

Full pressure hydraulic single lever (Unitrol) upper controls, including safety trigger, emergency stop and platform tilt for clean-out and rescue. Optional

Full platform emergency power
 Emergency stop at platform and pedestal
 Full functions at ground
 Aluminium inner telescopic boom, steel outer boom and pedestal
 Critical fasteners are torqued and sealed

